



**WELCOME
TO THE NEW
ERA OF LIGHTING**

Jainson
LED LIGHTS

TORPEDO

Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 2x2W / 3x2W / 4x2W / 6x2W / 9x2W / 12x2W

Diffuser Type: PMMA Lens

LED: Bridgelux

Lumen Efficiency: 130lm/W


CRI: >80

IP Rating: IP20

Beam Angle: 32°

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Dimensions:

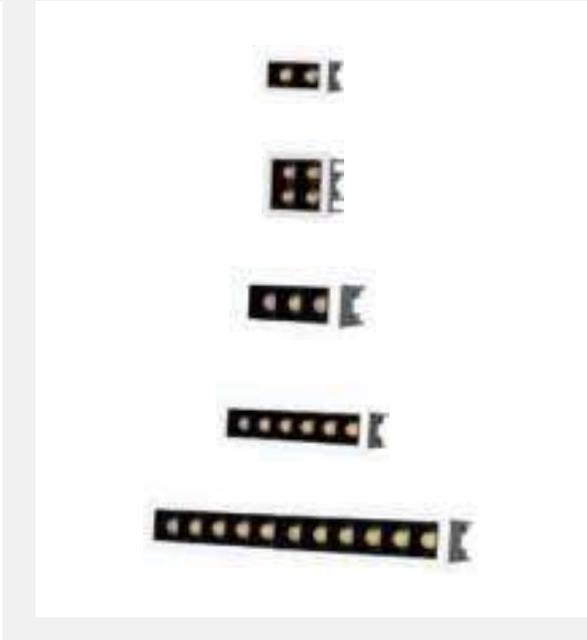

2x2W Linear

Outer Dia: 52x32mm
Depth: 40mm
Cut Out: 46x26mm

3x2W Linear

Outer Dia: 62x32mm
Depth: 40mm
Cut Out: 56x26mm

4x2W Square

Outer Dia: 52x52mm
Depth: 40mm
Cut Out: 46x46mm

6x2W Linear

Outer Dia: 108x32mm
Depth: 40mm
Cut Out: 102x26mm

9x2W Square

Outer Dia: 71x71mm
Depth: 40mm
Cut Out: 65x65mm

12x2W Linear

Outer Dia: 204x32mm
Depth: 40mm
Cut Out: 198x26mm





CUBE SERIES



Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 4W / 3x4W / 4x4W / 5x4W / 9x4W / 10x4W

LED: Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 38°

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Dimensions:

4W (Square)

Outer: 52x52mm
Depth: 56mm
Cut Out: 42x42mm

3x4W

Outer: 128x52mm
Depth: 56mm
Cut Out: 120x42mm

4x4w (Square)

Outer: 90x90mm
Depth: 56mm
Cut Out: 80x80mm

5x4W

Outer: 205x52mm
Depth: 56mm
Cut Out: 195x42mm

9x4W (Square)

Outer: 129x129mm
Depth: 56mm
Cut Out: 119x119mm

10x4W

Outer: 394x52mm
Depth: 56mm
Cut Out: 385x42mm





LASER



Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 2W / 2x2W / 5x2W / 10x2W / 15x2W

Diffuser Type: Clear

LED : Bridgelux

Lumen Efficiency: 100lm/W

CRI: >80

IP Rating: IP20

LED Col Temp: 3000K / 4000K / 6000K

Dimensions:

2W

Outer: 45x45mm
Height: 55mm
Cut Out: 37x37mm

2x2W

Outer: 75x45mm
Height: 55mm
Cut Out: 68x37mm

5x2W

Outer: 148x45mm
Height: 55mm
Cut Out: 140x37mm

10x2W

Outer:
Height: 55mm
Cut Out:

15x2W

Outer:
Height: 55mm
Cut Out:

MAGIC



Magic Linear - 8W



Magic Linear - 16W



Magic Linear L - 16W











Magic Linear Spot - 6W

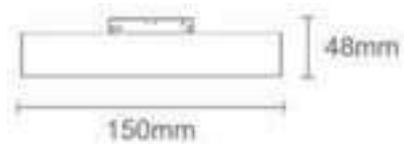

Magic Linear Spot - 12W



	Magic Surface Channel 1M	
	Magic Surface Channel 2M	



Magic Surface L Joint




Magic Surface Wall Joint



Magic Surface End Cap



Magic Surface Bottom Connection Plate

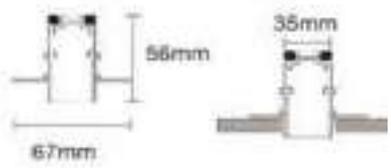	Magic Trimless Channel 1M	
	Magic Trimless Channel 2M	



Magic Trimless L Joint



Magic Trimless Wall Joint



Magic Trimless End Cap



Magic Trimless Bottom Connection Plate



Magic Trimless Side Connection



Magic Suspension Kit



Magic Live End - W/O Cable




Magic Live End - 1Mtr Cable




Magic Channel Connector



Magic Track Spot - 3W



Magic Track Spot - 7W



Magic Track Spot - 10W





Magic Pendant - 7W



Magic Linear Spot Adj - 12W



OSCAR



Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 12W

Diffuser Type: Clear

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >90

IP Rating: IP20

Beam Angle: 24° / 36° / 60°

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Dimensions:

12W

Outer Dia: Ø75mm

Depth: 83mm

Cut Out: Ø85mm





ORION WALL WASHER



Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 12W

Diffuser Type: Clear

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Dimensions:

12W

Outer Dia: Ø84mm

Depth: 73mm

Cut Out: Ø74mm

INSTALLATION NOTE:

Place the fixture 1Foot away from the wall & maintain a centre to centre distance between the fixtures of 1Foot to get even distribution of light.



ROBIN SERIES



Material : Aluminum Die Cast

Body Col: White / Black

Baffle Colours: White / Silver / Golden / Rose Gold / Chrome / Black Chrome

Wattage: 7W / 12W / 18W

Diffuser Type: Clear

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 24° / 36° / 60°

LED Col Temp: 3000K / 4000K / 6000K / Tuneable



Dimensions:

7W

Outer Dia: Ø73mm
Depth: 65mm
Cut Out: Ø65mm

12W

Outer Dia: Ø83mm
Depth: 80mm
Cut Out: Ø75mm

18W

Outer Dia: Ø100mm
Depth: 92mm
Cut Out: Ø90mm

LEO SERIES



Material : Aluminum Die Cast

Body Col: White / Black

Baffle Colours: White / Black / Grey / Rose Gold / Gold

Wattage: 6W / 12W / 18W

Diffuser Type: Clear

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 24° / 36° / 60°

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Dimensions:

6W

Outer Dia: Ø40mm
Depth: 55mm
Cut Out: Ø35mm

12W

Outer Dia: Ø59mm
Depth: 82mm
Cut Out: Ø55mm

18W

Outer Dia: Ø74mm
Depth: 55mm
Cut Out: Ø70mm



TARGET



Material : Aluminum Die Cast

Body Col: Black

Wattage: 7W

Diffuser Type: Clear

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 15°

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Dimensions:


Outer Dia: Ø65mm

Depth: 60mm

Cut Out: Ø54mm



HIDE

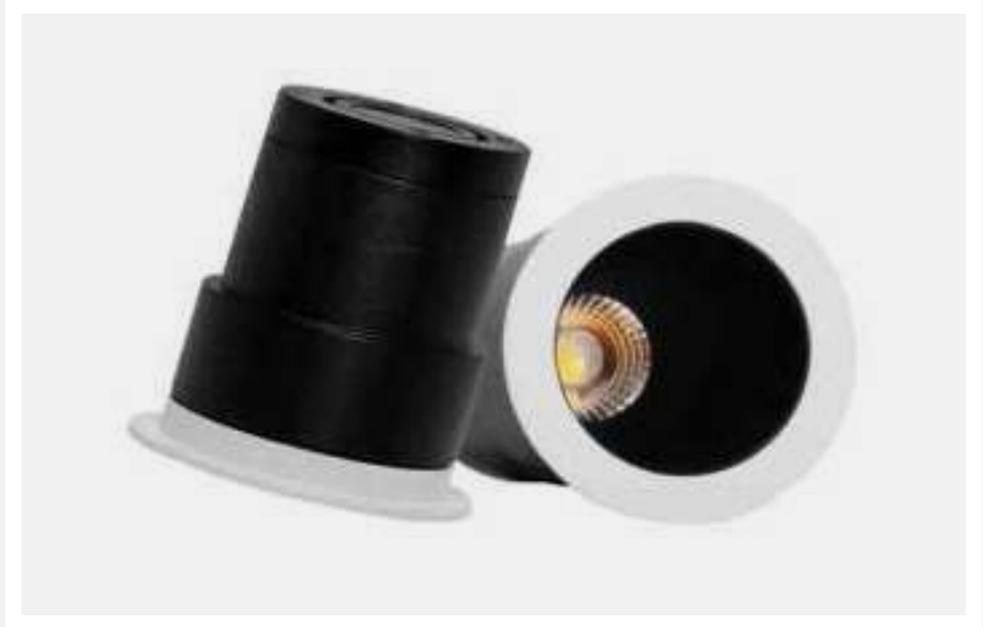

Material : Aluminum Die Cast

Body Col: White Trim Black Baffle

Wattage: 7W / 12W

Diffuser Type: Clear Lens

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 36°

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Dimensions:

7W

Outer Dia: Ø52mm
Depth: 72mm
Cut Out: Ø48mm

12W

Outer Dia: Ø68mm
Depth: 78mm
Cut Out: Ø58mm



COMFY DEEP RECESSED ROUND DOWN LIGHT

Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 8W / 15W / 22W

Diffuser Type: PMMA Milky

LED : Bridgelux

Lumen Efficiency: 100lm/W

CRI: >80

IP Rating: IP20

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Dimensions:

8W	15W	22W
Outer Dia: Ø120mm	Outer Dia: Ø148mm	Outer Dia: Ø170mm
Depth: 50mm	Depth: 50mm	Depth: 50mm
Cut Out: Ø110mm	Cut Out: Ø138mm	Cut Out: Ø160mm





SLEEK



Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 7W / 13W / 21W

Diffuser Type: Clear

LED: Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 7W - 15°/24°/36°
 13W - 15°/25°/38°/60°
 21W - 24°/38°/60°

LED Col Temp: 3000K / 4000K /
 6000K / Tuneable

Dimensions:

7W

Outer Dia: Ø60mm
 Depth: 78mm
 Cut Out: Ø53mm

13W

Outer Dia: Ø71mm
 Depth: 95mm
 Cut Out: Ø62mm

21W

Outer Dia: Ø84mm
 Depth: 125mm
 Cut Out: Ø75mm

GLOW RING



Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 8W / 15W

Diffuser Type: Clear

LED: Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 8W - 15°/24°/36°
15W - 15°/25°/38°/60°

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Dimensions:

8W

Outer Dia: Ø120mm
Depth: 50mm
Cut Out: Ø110mm

15W

Outer Dia: Ø148mm
Depth: 50mm
Cut Out: Ø138mm



DUKE WW



Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 12W

Diffuser Type: Clear

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 15°/25°/38°/60°

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Dimensions:

Outer Dia: Ø87mm

Depth: 70mm

Cut Out: Ø81mm

DUET

Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 12W

Diffuser Type: Clear

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 24° / 36° / 60°

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Dimensions:

12W

Outer Dia: 52x32mm

Depth: 40mm

Cut Out: 46x26mm



JOY

Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 12W

Diffuser Type: Clear

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 24° / 36° / 60°

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Dimensions:

12W

Outer Dia: Ø85mm

Depth: 80mm

Cut Out: Ø70mm



SCOOP SERIES

Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 4W / 7W / 12W / 18W

Diffuser Type: Clear

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

LED Col Temp: 3000K / 4000K / 6000K / Tuneable



Dimensions:

4W

Outer Dia: Ø45mm
Depth: 65mm
Cut Out: Ø35mm

7W

Outer Dia: Ø75mm
Depth: 57mm
Cut Out: Ø65mm

12W

Outer Dia: Ø85mm
Depth: 65mm
Cut Out: Ø75mm

18W

Outer Dia: Ø95mm
Depth: 82mm
Cut Out: Ø85mm





TILT ROUND



Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 4W / 6W / 9W / 12W / 15W / 18W / 24W / 30W / 36W / 40W / 50W

Diffuser Type: Clear

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Dimensions:

4W	6W-9W	12W
Outer Dia: Ø70mm	Outer Dia: Ø102mm	Outer Dia: Ø102mm
Depth: 40mm	Depth: 58mm	Depth: 70mm
Cut Out: Ø 62mm	Cut Out: Ø86mm	Cut Out: Ø86mm
15W-18W	24W-30W-36W	12x2W Linear
Outer Dia: Ø125mm	Outer Dia: Ø148mm	Outer Dia: Ø170mm
Depth: 70mm	Depth: 85mm	Depth: 85mm
Cut Out: Ø110mm	Cut Out: Ø132mm	Cut Out: Ø154mm

DUKE SERIES

Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 4W / 7W / 12W / 18W

Diffuser Type: Clear

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Dimensions:

4W

7W

12W

18W

Outer Dia: Ø45mm

Outer Dia: Ø75mm

Outer Dia: Ø85mm

Outer Dia: Ø95mm

Depth:

Depth:

Depth:

Depth:

Cut Out:

Cut Out:

Cut Out:

Cut Out: `



TILT SQUARE

Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 4W / 6W / 9W / 12W / 15W / 18W / 24W / 30W / 36W / 40W / 50W

Diffuser Type: Clear

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

LED Col Temp: 3000K / 4000K / 6000K / Tuneable



Dimensions:

4W	6W - 9W	12W	15W - 18W	24W - 30W - 36W	40W-50W
Outer: 62x62mm	Outer: 102x102mm	Outer: 102x102mm	Outer: 125x125mm	Outer: 148x148mm	Outer: 170x170mm
Depth: 40mm	Depth: 58mm	Depth: 70mm	Depth: 70mm	Depth: 85mm	Depth: 85mm
Cut Out: Ø 55mm	Cut Out: Ø86mm	Cut Out: Ø86mm	Cut Out: Ø110mm	Cut Out: Ø132mm	Cut Out: Ø154mm



SWIRL SERIES

Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 12W / 20W / 25W / 30W
2x12W / 2x20W / 2x25W / 2x30W

Diffuser Type: Clear

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 24° / 36° / 60°

LED Col Temp: 3000K / 4000K / 6000K / Tuneable



Dimensions:

<u>12W</u>	<u>2x12W</u>	<u>20W</u>	<u>2x20W</u>	<u>25W - 30W</u>	<u>2x(25 - 30W)</u>
Outer: 120x120mm	Outer: 120x120mm	Outer: 140x140mm	Outer: 265x140mm	Outer: 170x170mm	Outer: 315x170mm
Depth: 70mm	Depth: 70mm	Depth: 90mm	Depth: 90mm	Depth: 96mm	Depth: 96mm
Cut Out: 115x115mm	Cut Out: 215x115mm	Cut Out: 135x135mm	Cut Out: 260x135mm	Cut Out: 165x165mm	Cut Out: 309x165mm



FLASH

Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 15W / 20W / 25W / 30W / 40W

Diffuser Type: Clear

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 24° / 36° / 60°

LED Col Temp: 3000K / 4000K / 6000K / Tuneable



Dimensions:

15W

Outer Dia: Ø mm
Depth: mm
Cut Out: Ø mm

20W

Outer Dia: Ø mm
Depth: 70mm
Cut Out: Ø mm

25W

Outer Dia: Ø mm
Depth: mm
Cut Out: Ø mm

30W

Outer Dia:
Ø 265x140mm
Depth: 90mm
Cut Out: Ø mm

40W

Outer Dia: Ø mm
Depth: mm
Cut Out: Ø mm





COMFY SERIES



Material : Aluminum Die Cast

Shape: Round / Square

Body Col: White / Black

Wattage: 8W / 12W / 18W / 24W

Diffuser Type: Milky

LED : Bridgelux

Lumen Efficiency: 100lm/W

CRI: >80

IP Rating: IP20

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Dimensions:

8W Ro | 8W

Outer: Ø120mm | 120x120mm
Depth: 35mm | 35mm
Cut Out: Ø100mm | 100x100mm

18W Ro | 18W

Outer: Ø170mm | 170x170mm
Depth: 35mm | 35mm
Cut Out: Ø150mm | 150x150mm

12W Ro | 12W

Outer: Ø145mm | 145x145mm
Depth: 35mm | 35mm
Cut Out: Ø125mm | 125x125mm

24W Ro | 24W

Outer: Ø195mm | 195x195mm
Depth: 35mm | 35mm
Cut Out: Ø175mm | 175x175mm

STARK SERIES



Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 7W / 12W / 18W

Diffuser Type: Clear

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 24° / 36° / 60°

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Dimensions:

7W

Outer Dia: Ø62mm
Depth: 42mm
Cut Out: Ø52mm

12W

Outer Dia: Ø74mm
Depth: 50mm
Cut Out: Ø64mm

18W

Outer Dia: Ø77mm
Depth: 63mm
Cut Out: Ø67mm



DUKE SQUARE

Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 7W / 12W / 18W

Diffuser Type: Clear

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 24° / 36° / 60°

LED Col Temp: 3000K / 4000K / 6000K / Tuneable



Dimensions:

7W

Outer: 73x73mm
Depth: 65mm
Cut Out: 68x68mm

12W

Outer: 84x84mm
Depth: 74mm
Cut Out: 79x79mm

18W

Outer: 94x94mm
Depth: 94mm
Cut Out: 89x89mm



ESTEAM SERIES (IP44) Steam Proof



Material : Aluminum Die Cast

Body Col: White

Wattage: 3W / 6W / 10W

Diffuser Type: Clear

LED : Bridgelux

Lumen Efficiency: 100lm/W

CRI: >80

IP Rating: IP44

Beam Angle: (3W - 6W) 24° | (10W) 38°

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Dimensions:

3W

Outer Dia: Ø43mm
Depth: 33mm
Cut Out: Ø33mm

6W

Outer Dia: Ø70mm
Depth: 35mm
Cut Out: Ø60mm

10W

Outer Dia: Ø84mm
Depth: 69mm
Cut Out: Ø72mm



STALLION SERIES

Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 10W / 14W / 2x14W

Diffuser Type: Clear

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 24°

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Dimensions:

10W

Outer Dia: Ø84mm
Depth: 87mm
Cut Out: Ø75mm

14W

Outer Dia: Ø100mm
Depth: 117mm
Cut Out: Ø92mm

2x14W

Outer: 185x100mm
Depth: 96mm
Cut Out: 169x89mm





STALLION FX



Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 10W

Diffuser Type: Clear

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 38°

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Dimensions:

10W

Outer Dia: Ø55mm

Depth: 20mm

Cut Out: Ø44mm

TINY SERIES

Material : Aluminum Die Cast

Body Col: White / Copper

Wattage: 1W

LED : Nichia

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

LED Col Temp: 3000K / 4000K / 6000K

Dimensions:

Tiny

Outer Dia: Ø16mm
Depth: 20mm
Cut Out: Ø12mm

Tiny Deep Recessed

Outer Dia: Ø16mm
Depth: 25mm
Cut Out: Ø12mm





MINI



Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 3W

LED: Cree

Lumen Efficiency: 90lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 30°

LED Col Temp: 3000K / 4000K / 6000K

Dimensions:

3W

Outer Dia: Ø35mm

Depth: 20mm

Cut Out: Ø24mm

PECAN ROUND



Material : Aluminum Die Cast

Body Col: White / Black

Baffle Colours: White / Black / Golden / Rose Gold / Chrome

Wattage: 7W / 10W/ 12W / 15W / 18W

LED: Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 24° / 36° / 60°

Dimensions:

7W	10W - 12W	15W - 18W
Outer Dia: Ø80mm Height: 110mm	Outer Dia: Ø80mm Height: 150mm	Outer Dia: Ø80mm Height: 180mm





PECAN SQUARE



Material : Aluminum Die Cast

Body Col: White / Black

Baffle Colours: White / Black / Gold / Copper / Silver

Wattage: 7W / 12W

LED: Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 24° / 36° / 60°

LED Col Temp: 3000K / 4000K / 6000K

Dimensions:

7W

Outer: 74X74mm
Height: 95mm

12W

Outer: 90X90mm
Height: 110mm



NEAPOLIAN



Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 12W

LED: Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 24° / 36° / 60°

LED Col Temp: 3000K / 4000K / 6000K

Dimensions:

12W

Outer Dia: Ø90mm

Height: 110mm

JOLLY



Material : Aluminum Die Cast

Body Col: White

Wattage: 24W / 36W / 40W

LED: Bridgelux

Lumen Efficiency: 90lm/W

CRI: >80

IP Rating: IP20

LED Col Temp: 3000K / 4000K / 6000K


Dimensions:

24W - 36W - 40W

Outer: 595x595mm

Depth: 30mm



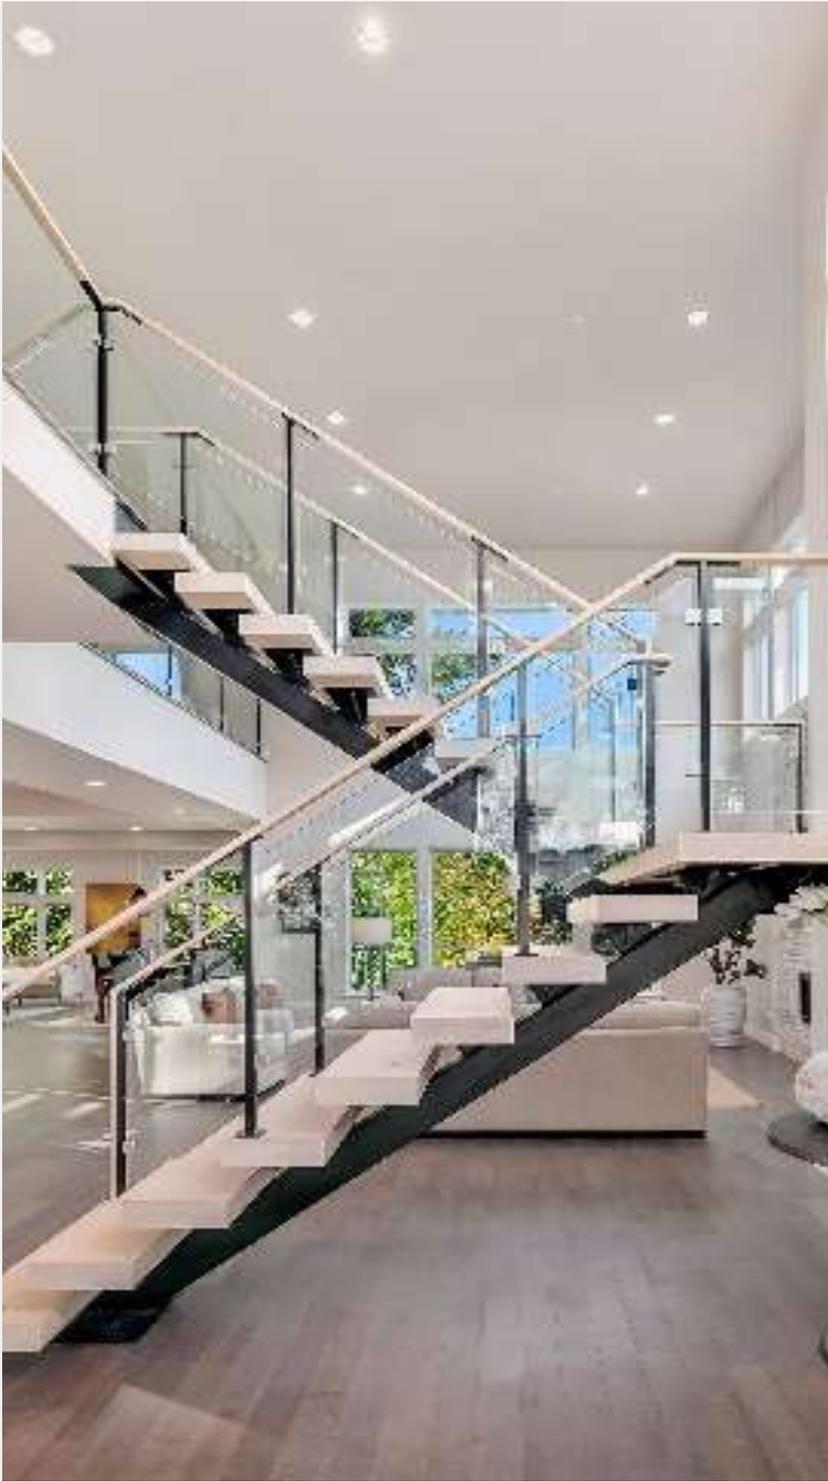

MAGNUM SERIES



Material : Aluminum Die Cast

Body Col: White / Black

Baffle Colours: White / Black / Gold / Copper / Silver

Wattage: 7W / 12W

LED: Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 24° / 36° / 60°

LED Col Temp: 3000K / 4000K / 6000K

Dimensions:

7W	9W	14W	20W	30W
Outer Dia: Ø60mm	Outer Dia: Ø82mm	Outer Dia: Ø100mm	Outer Dia: Ø130mm	Outer Dia: Ø160mm
Depth: 65mm	Depth: 83mm	Depth: 107mm	Depth: 119mm	Depth: 129mm
Cut Out: Ø53mm	Cut Out: Ø70mm	Cut Out: Ø84mm	Cut Out: Ø109mm	Cut Out: Ø136mm



LOGIC



Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 25W / 35W

Diffuser Type: Clear

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >90

Installation Method: On Single Circuit Track

IP Rating: IP20

Beam Angle: 24° / 36° / 60°

LED Col Temp: 3000K / 4000K / 6000K

Dimensions:

25W

Outer Dia: Ømm
Height: 140mm

35W

Outer Dia: Ømm
Height: 170mm

TREAT



Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 10W / 20W / 30W

Diffuser Type: Clear

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >90

Installation Method: On Single Circuit Track

IP Rating: IP20

Beam Angle: 24° / 36° / 60°

LED Col Temp: 3000K / 4000K / 6000K

Dimensions:

10W

Outer Dia: Ø50mm
Height: 135mm


20W

Outer Dia: Ø65mm
Height: 160mm

30W

Outer Dia: Ø75mm
Height: 185mm



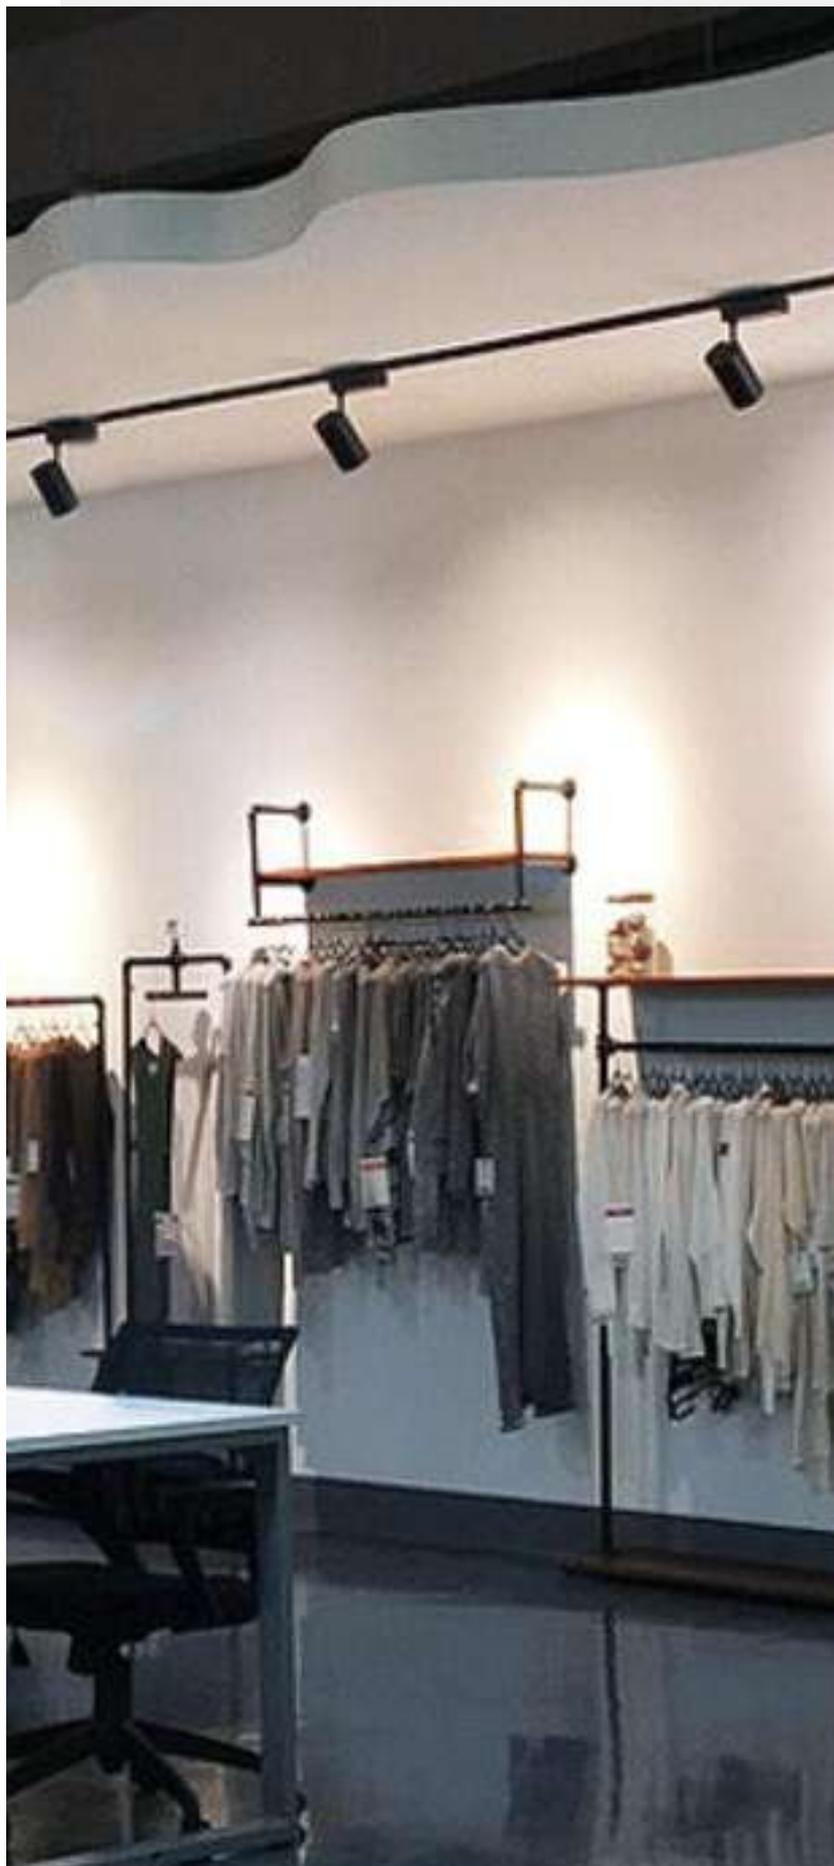

FLOW



Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 10W / 20W / 30W

Diffuser Type: Clear

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >90

Installation Method: On Single Circuit Track

IP Rating: IP20

Beam Angle: 24° / 36° / 60°

LED Col Temp: 3000K / 4000K / 6000K

Dimensions:

10W

Outer Dia: Ø63mm
Height: 106mm

20W

Outer Dia: Ø90mm
Height: 120mm

30W

Outer Dia: Ø95mm
Height: 135mm

CAN



Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 15W / 30W

Diffuser Type: Clear

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >90

Installation Method: On Single Circuit Track

IP Rating: IP20

Beam Angle: 24° / 36° / 60°

LED Col Temp: 3000K / 4000K / 6000K

Dimensions:

15W

Outer Dia: Ø68mm
Height: 140mm

20W

Outer Dia: Ø90mm
Height: 170mm





VERNA



Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 10W / 20W / 30W / 40W

Diffuser Type: Clear

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >90

Installation Method: On Single Circuit Track

IP Rating: IP20

Beam Angle: 24° / 36° / 60°

LED Col Temp: 3000K / 4000K / 6000K

Dimensions:

10W - 20W

Outer Dia: Ø68mm
Height: 140mm

30W - 40W

Outer Dia: Ø90mm
Height: 170mm



COMFY SURFACE SERIES



Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 4W / 8W / 12W / 16W / 18W / 24W

Diffuser Type: Clear

LED : Bridgelux

Lumen Efficiency: 100lm/W

CRI: >90

IP Rating: IP20

Beam Angle: 24° / 36° / 60°

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Dimensions:

W

Outer Dia: Ømm
Height: mm

W

Outer Dia: Ømm
Height: mm

GLOW RING SURFACE



Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 12W

Diffuser Type: Clear

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >90

IP Rating: IP20

Beam Angle: 38°

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Dimensions:

12W

Outer Dia: Ø85mm

Height: 95mm





LED STRIP

12V LED STRIP



120 LED/Mtr Strip (5Mtr Roll)
 LED Chip: 2835
 Operating Voltage: 12V
 Width: 10mm | IP20
 LED Col Temp: 3000K / 4000K / 6000K



240 LED/Mtr Strip (5Mtr Roll)
 LED Chip: 2835
 Operating Voltage: 12V
 Width: 10mm | IP20
 LED Col Temp: 3000K / 4000K / 6000K



120 LED/Mtr Strip (5Mtr Roll)
 LED Chip: 2835
 Operating Voltage: 12V
 Width: 5mm | IP20
 LED Col Temp: 3000K / 4000K / 6000K

24V LED STRIP



120 LED/Mtr Strip (5Mtr Roll)
 LED Chip: 2835
 Operating Voltage: 24V
 Width: 10mm | IP20
 LED Col Temp: 3000K / 4000K / 6000K



240 LED/Mtr Strip (5Mtr Roll)
 LED Chip: 2835
 Operating Voltage: 24V
 Width: 10mm | IP20
 LED Col Temp: 3000K / 4000K / 6000K



TUNEABLE WHITE 120 LED/Mtr Strip
 (5Mtr Roll)
 LED Chip: 2835
 Operating Voltage: 24V
 Width: 10mm | IP20



RGB + TUNEABLE WHITE LED Strip
 (5Mtr Roll)
 LED Chip: 5050 + 2835
 Operating Voltage: 24V
 Width: 12mm | IP20

COMFY DEEP RECESSED SQUARE DOWN LIGHT



Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 8W / 15W / 22W

Diffuser Type: PMMA Milky

LED : Bridgelux

Lumen Efficiency: 100lm/W

CRI: >80

IP Rating: IP20

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Dimensions:

8W

15W

22W

Outer: 110x110mm

Outer: 143x143mm

Outer: 165x165mm

Depth: 50mm

Depth: 50mm

Depth: 50mm

Cut Out: 100x100mm

Cut Out: 133x133mm

Cut Out: 155x155mm



ALUMINUM CHANNELS

17mm Surface
Aluminium Profile



17mm Recessed
Aluminium Profile



7mm Surface
Aluminium Profile




7mm Recessed
Aluminium Profile



35mm Surface
Aluminium Profile



35mm Recessed
Aluminium Profile



17mm Corner
Aluminium Profile



OTHER SIZES AND CUSTOMIZED
SHAPES AVAILABLE UPON REQUEST



DISK



1W



5W

Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 1W / 5W

Diffuser Type: PMMA Milky (1W) / LENS (5W)

LED : Bridgelux

Lumen Efficiency: 100lm/W

CRI: >80

IP Rating: IP20

LED Col Temp: 3000K / 4000K / 6000K

Dimensions:

1W

Outer Dia: Ø45mm
Height: 8mm

5W

Outer Dia: Ø73mm
Height: 20mm



PLUTO

Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 7W/12W/15W/18W/24W

Diffuser Type: Lens

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 15°/25°/38°/60°

LED Col Temp: 3000K / 4000K / 6000K / Tuneable



Dimensions:

7W Ro

Outer: Ø65mm
Depth: 55mm
Cut Out: Ø 55mm

12W Ro

Outer: Ø87mm
Depth: 69mm
Cut Out: Ø75mm

15W Ro

Depth: 69mm
Cut Out: Ø75mm
Cut Out: Ø75mm

18W Ro

Outer: Ø107mm
Depth: 86mm
Cut Out: Ø95mm

24W Ro

Outer: Ø107mm
Depth: 86mm
Cut Out: Ø95mm



SHARP TWIN

Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 12W/24W

Diffuser Type: Lens

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 15°/24°/36°

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Dimensions:

12W

Outer: Ø96mm X 96mm
Depth: 102mm

12W X 2 HEAD

Outer: Ø192mm X 96mm
Depth: 120mm



SHARP SQUARE



Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 12W

Diffuser Type: Lens

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Beam Angle: 15°/24°/36°

Dimensions:

12W

Outer: Ø83mm X 83mm

Depth: 95mm

Cut Out: Ø75mm X 75mm



SHARP KEY HOLE

Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 12W

Diffuser Type: Lens

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 15°/24°/36°

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Dimensions:

12W

Outer: Ø83mm

Depth: 83mm

Cut Out: Ø75mm



SHARP PIN HOLE



Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 12W

Diffuser Type: Lens

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Beam Angle: 15°/24°/36°

Dimensions:

12W

Outer Dia: Ø83mm

Depth: 83mm

Cut Out: Ø75mm



SHARP TRIMLESS

Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 12W

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

LED Col Temp: 3000K / 4000K / 6000K

Beam Angle: 15°/24°/36°

Dimensions:

12W

Outer: Ø83mm

Depth: 83mm

Cut Out: Ø75mm



SHARP TWIN



Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 14W/24W

Diffuser Type: Lens

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Dimensions:

7W X 2 HEAD

Outer: Ø180mm X 100mm
Depth: 65mm
Cut Out: Ø 165mm X 80mm

12W X 2 HEAD

Outer: Ø205mm X 100mm
Depth: 65mm
Cut Out: Ø 185mm X 80mm



SHARP

Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 7W/12W/18W/24W

Diffuser Type: Lens

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Dimensions:

7W

Outer: Ø65mm
Depth: 65mm
Cut Out: Ø 55mm

12W

Outer: Ø83mm
Depth: 83mm
Cut Out: Ø75mm

18W

Outer: Ø110mm
Depth: 110mm
Cut Out: Ø95mm

24W

Outer: Ø110mm
Depth: 110mm
Cut Out: Ø95mm



CARROM

Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 5W/7W/12W/15W

Diffuser Type: Lens

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Dimensions:

5W

Outer: Ø63mm
Depth: 23mm
Cut Out: Ø 55mm

9W

Outer: Ø73mm
Depth: 28mm
Cut Out: Ø65mm

12W

Outer: Ø83mm
Depth: 30mm
Cut Out: Ø75mm

15W

Outer: Ø93mm
Depth: 30mm
Cut Out: Ø85mm



POD LINEAR WALL WASHER



Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 12W / 24W

Diffuser Type: Lens

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 36°

LED Col Temp: 3000K / 4000K / 6000K

Dimensions:

12W

Outer: Ø141mm X 49mm
 Depth: 49mm
 Cut Out: 136mm X 45mm

24W

Outer: Ø255mm X 45mm
 Depth: 49mm
 Cut Out: Ø250mm X 49mm



MAYBACH

Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 7W,12W,15W,18W,24W

Diffuser Type: Lens

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 15°/25°/38°/60°

LED Col Temp: 3000K / 4000K / 6000K / Tuneable



Dimensions:

7W Ro

Outer: Ø85mm
Depth: 50mm
Cut Out: Ø 75mm

12W Ro

Outer: Ø85mm
Depth: 50mm
Cut Out: Ø75mm

15W Ro

Outer: Ø100mm
Depth: 60mm
Cut Out: Ø90mm

18W Ro

Outer: Ø100mm
Depth: 60mm
Cut Out: Ø90mm

20W Ro

Outer: Ø125mm
Depth: 65mm
Cut Out: Ø115mm

24W Ro

Outer: Ø125mm
Depth: 65mm
Cut Out: Ø115mm



PRIME

Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 7W,10W,15W,18W,24W

Diffuser Type: Lens

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 24°/36°

LED Col Temp: 3000K / 4000K / 6000K / Tuneable



Dimensions:

7W Ro

Outer: Ø82mm
Depth: 75mm
Cut Out: Ø 75mm

10W Ro

Outer: Ø82mm
Depth: 75mm
Cut Out: Ø75mm

12W Ro

Outer: Ø82mm
Depth: 101mm
Cut Out: Ø75mm

15W Ro

Outer: Ø82mm
Depth: 75mm
Cut Out: Ø75mm

18W Ro

Outer: Ø110mm
Depth: 95mm
Cut Out: Ø105mm

24W Ro

Outer: Ø110mm
Depth: 95mm
Cut Out: Ø105mm



POD LINEAR

Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 3W/6W/12W

Diffuser Type: Lens

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 36°

LED Col Temp: 3000K / 4000K / 6000K / Tuneable



Dimensions:

3W

Outer: Ø45mm X 45mm
Depth: 49mm
Cut Out: 38mm X 38mm

6W

Outer: Ø75mm X 45mm
Depth: 49mm
Cut Out: Ø68mm X 38mm

12W

Outer: Ø145mm X 45mm
Depth: 49mm
Cut Out: Ø140mm X 38mm



ASIMO

Material : Aluminum Die Cast

Body Col: White / Black

Wattage: 7W,12W

Diffuser Type: Lens

LED : Bridgelux

Lumen Efficiency: 130lm/W

CRI: >80

IP Rating: IP20

Beam Angle: 36°

LED Col Temp: 3000K / 4000K / 6000K / Tuneable

Dimensions:

7W

Outer: Ø90mm
Depth: 20mm
Cut Out: Ø 75mm

12W

Outer: Ø90mm
Depth: 20mm
Cut Out: Ø75mm

